


SEWAGE TYTON PIPES DN 100 to 1000		Date	09/ 04/ 2023

TYTON ISO7186 Pipe

DN100-1000

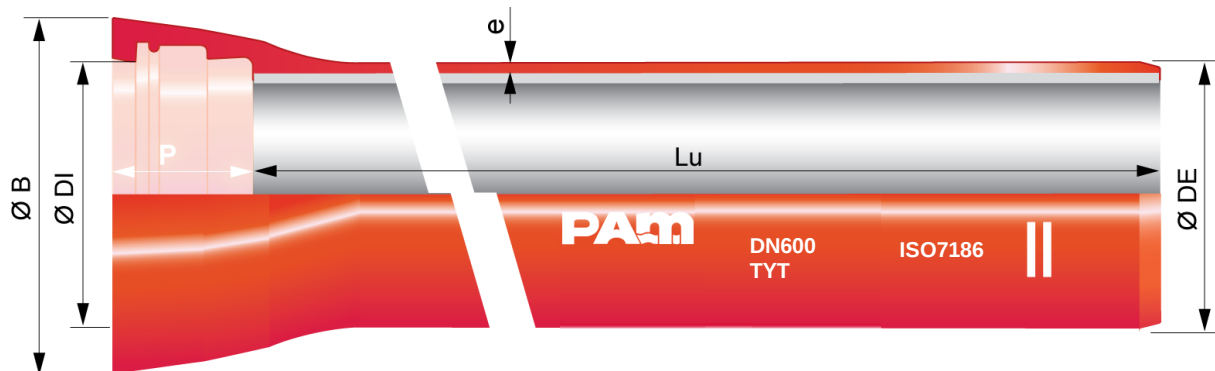

DN mm	Lu m	e mm	DE mm	DI mm	P mm	B mm
100	5.75	4.4	118	120.5	88	163
150	5.75	4.5	170	172.5	94	217
200	5.75	4.7	222	224.5	100	278
250	5.75	4.9	274	276,5	105	336
300	5.75	5.1	326	328,5	110	393
350	5.75	5.7	378	380,9	110	448
400	5.75	6.3	429	431,5	110	500
450	5.75	6.4	480	482.5	120	540
500	5.75	6.5	532	534.5	120	604
600	5.75	7.5	635	637.5	120	713
700	5.75	8.5	738	740.5	150	824
800	5.75	9.6	842	844.5	160	943
900	5.75	10.6	945	947.5	175	1052
1000	5.75	11.6	1048	1050.5	185	1158

Legend:

- DN: nominal diameter
- Lu: laying length, in m
- e: thickness according to ISO 7186, in mm
- ØDE: external nominal diameter of the barrel according to ISO 7186, in mm
- ØDI: internal nominal diameter of the socket, in mm
- P: nominal depth of the socket, in mm
- ØB: nominal diameter of the socket, in mm

SEWAGE TYTON PIPES DN 100 to 1000		Date	09/ 04/ 2023

Field of use:

- Separate sewer system and combined sewer system
- Application: gravity flow and rising main sewerage systems
- Type of effluent: domestic wastewater and rainwater
- Perfectly watertight
- For effluents between pH4 and pH12

Main characteristics:

- External coating: a layer of zinc, with surface density of 200 g/m² covered with a red finishing layer.
- Internal lining: HAC
- Tyton Gasket in Nitrile
- ISO 7186